

INDOOR PTZ

DHI Series

Indoor High Speed Dome Camera



Features:

- New version design
- High Die-cast Aluminum Construction
- Low noise design
- OSD function
- 128 presets position
- 6 cruising track, each cruising track has 16 preset positions
- 6 privacy zone masking
- 40s Pattern Tours (path memory function)
- Multi-protocol communication
- RS485 data communication
- 4-Alarm input and 1-Alarm output
- AC24V input

Optional Parts




Embedded Bracket
MC0702



Nickle-plate Glister Dome Cover
M05

Dimension

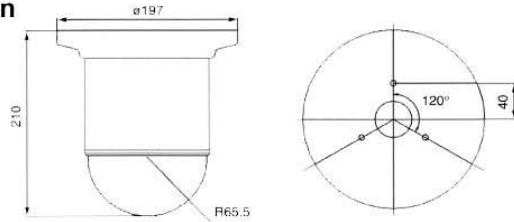

Specification

MODEL	DHI18X	DHI18XN	DHI23XN	DHI26XN	DHI27XN
Image sensor	1/4" CCD				
Active pixels	752(H) × 582(V)	752(H) × 582(V)	758(H) × 592(V)	752(H) × 582(V)	795(H) × 596(V)
Synchronization	Internal/Extrinsic				
Video output	VBS1.0Vp-p/75 ohms				
White balance	Auto/Manual				
Scanning frequency	15.625KHz(H) 50Hz(V)				
Horizontal resolution	480TVL	480TVL	480TVL	480TVL	480TVL
S/N Ratio	50dB	50dB	≥50dB	≥50dB	≥50dB
Electronic shutter	1/3 ~ 1/10,000s	1/3 ~ 1/10,000s	1/3 ~ 1/10,000s	1/3 ~ 1/10,000s	1/50 ~ 1/10,000s
Min.illumination	0.7Lux	0.01Lux	0.01Lux	0.01Lux	0.01Lux
Focal length	f=4.1 ~ 73.8mm 18 ×	f=4.1 ~ 73.8mm 18 ×	f=3.6 ~ 82.8mm 23 ×	f=3.5 ~ 91mm 26 ×	f=3.6 ~ 98mm 27 ×
Focal & Iris	Auto/Manual				
Pan speed	0° ~ 300° /s				
Tilt speed	0° ~ 120° /s				
Panning range	360° Continuously				
Tilt range	90° (180° auto overturn)				
Preset	128 (max)				
Communication	Multi-protocol,RS485				
Relative humidity	10-75% without agglomeration				
Work temperature	0°C ~ 50°C				
Power supply	AC24V, 1.5A, external				
Power consumption	20VA				
Weight	2Kg				

Design and specifications are subject to change without prior notice