

MTC-1438HQ MTC-1438H MTC1338



FEATURES

MTC-1438HQ

MTC-1438H

MTC-1338



MTC-1438HQ


1/3" Super Hi-Res.
SONY HQ1/ 540TVL/ 0.2Lux@F1.2
Built-in Aspherical Lens
AES/AGC/BLC/Flickerless Switchable(ON/OFF)

MTC-1438H

1/3" Hi-Res.
480TVL/ 0.3Lux@F1.2
Built-in Aspherical Lens
AES/AGC/BLC/Flickerless Switchable(ON/OFF)

MTC-1338

1/3" Med-Res.
420TVL/ 0.15Lux@F1.2
Built-in Aspherical Lens
AES/AGC/BLC/Flickerless Switchable(ON/OFF)

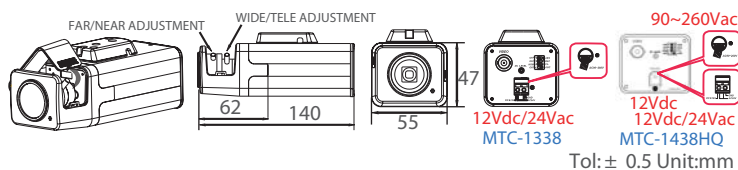

SPECIFICATIONS

	MTC-1438HQ		MTC-1438H		MTC-1338	
TV System	PAL	NTSC	PAL	NTSC	PAL	NTSC
Image Sensor	1/3" SONY Super HAD CCD					
Number of Total Pixels	795(H)X596(V)	811(H)X508(V)	795(H)X596(V)	811(H)X508(V)	537(H)X597(V)	537(H)X505(V)
Synchronizing System	Internal					
Resolution	540 TVL		480 TVL		420 TVL	
Minimum Illumination	0.2Lux@F1.2		0.3Lux@F1.2		0.15Lux@F1.2	
Signal to Noise Ratio	More Than 50dB(AGC Off)		More Than 50dB(AGC Off)		More Than 48dB(AGC Off)	
AES	ON/OFF (Switchable)					
Back Light Compensation	ON/OFF (Switchable)					
Automatic Gain Control	ON/OFF (Switchable)					
F.L. (Flickerless)	ON/OFF (Switchable)					
White Balance	AWB				ATW	
Video Output	1Vp-p Composite / 75 Ω					
Lens/Angle of view(H)	Standard:f2.9mm~10mm/F1.2 Aspherical Auto Iris Lens / 94.6 °~28.8 ° Option:f2.5mm~6.0mm/F1.3 Aspherical Auto Iris Lens / 108.2 ~47.6 °					
Power Supply	12Vdc; 12Vdc/24Vac ;90~260Vac					
Power Consumption	2.0W		1.6W		1.8W	
Operation Temperature	-10°C~+50°C					
Operation Humidity	RH85% or less					
Storage Temperature	-20°~60°C					
Dimensions	55(W) X 47(H) X 140(L)mm					
Weight	12Vdc: 230g; 12Vdc/24Vac: 300g 90~260Vac: 350g				12Vdc/24Vac: 300g; 90~260Vac: 350g	

