


# MPEG4 IP IR Camera

## WTC-L7638HQ




WTC-L7638HQ

### FEATURES



## WTC-L7638HQ new

1/3" SONY Super Hi-Res.  
 SONY HQ1/ 540TVL/ 0 Lux  
 MPEG4 SP Compression  
 Resolution up to Full D1  
 Option:POE

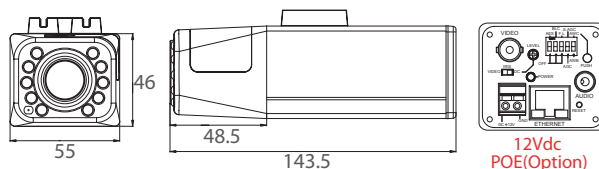

Tol:± 0.5 Unit:mm

### SPECIFICATIONS

		WTC-L7638HQ	
		PAL	NTSC
Image System	TV System	1/3" SONY Super HAD CCD	
	Effective Pixels(H x V)	795(H) x 596(V)	811(H) x 508(V)
	Resolution	540TVL	
	Synchronizing System	Internal	
	Minimum Illumination	0Lux (IR LED ON at 2 Lux)/controlled by a CDS sensor	
	Electronic Shutter	AES On: 1/50 (60) sec. ~ 1/100,000 sec; AES Off: 1/50 (60) sec.	
	Back Light Compensation	ON/ OFF (Switchable)	
	Auto Gain Control	ON/ OFF (Switchable)	
	Flicker Less	ON/ OFF (Switchable)	
	Auto IRIS Control	Video / DC (Switchable)	
	Auto White Balance	AWB	
	Signal to Noise Ratio	More than 50dB (AGC off)	
	Video Output	1Vp-p Composite/75 Ω	
Lens Mount	C/CS (With Adaptor)		
Compression	Image Compression	MPEG4 SP	
	Image Frame Rate	25 fps @ 720x576	30 fps @ 720x480
	Max Resolution	Full D1 / CIF / QCIF	
Network	Ethernet	10/100 base-T for LAN/WAN	
	Supported Protocol	TCP/IP, HTTP, ARP, PPPoE, DDNS, DHCP, RTP/RTSP,IGMP	
	QoS	Layer 2, 3	
I/O Connector	Network	2xRJ-45 (WAN/LAN)	
	Analog Video Output	1xComposite ( BNC )	
	Serial Port	1xRJ-45 port ( RS485 )	
Software OS Support	Win 2000, Win XP, / 16Ch AP		
Watchdog Timer	5 sec.		
Security	User authorization for accessing camera		
Lens/Angle of view (Horizontal)	Standard:f2.9mm~10mm/F1.2 Aspherical D/N Lens / 94.6 ° ~28.8 °		
Operation Temperature	-10 °C ~50 °C		
Operation Humidity	RH85% or less		
Storage Temperature	-20 °C ~60 °C		
Power Supply	Standard:12Vdc(9.0W) ; POE Option		
Dimensions	55(W) X 47(H) X 140(L)mm		
Weight	600g		