

# Indoor IR Camera

## MTC-L605DHQ, MTC-L605D

### FEATURES

3D Free Rotation



MTC-L605DHQ

MTC-L605D



Option:



MTB-201



Wall Mount




Attach Ceiling Top Plate

### MTC-L605DHQ

1/3" Super Hi-Res.  
SONY HQ1/ 540TVL/ 0 Lux  
IR LEDs on at 2 Lux  
Build in 24 IR LEDs.  
Illuminating Distance to 15 m

### MTC-L605D

1/3" SONY Super HAD CCD  
420TVL/ 0 Lux  
IR LEDs on at 2 Lux  
Built-in 24 IR LEDs  
Illuminating Distance to 15 m

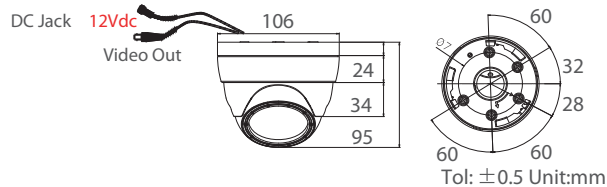

### SPECIFICATIONS

	MTC-L605DHQ		MTC-L605D	
TV System	PAL	NTSC	PAL	NTSC
Image Sensor	1/3" SONY Super HAD CCD			
Number of Total Pixels	795(H)x596(V)	811(H)x508(V)	537(H)x597(V)	537(H)x505(V)
Resolution ; DSP	540TVL ; SONY HQ1		420TVL	
Minimum Illumination	0Lux			
Video Output ; Connector	1.0Vp-p Composite, 75 Ω ; BNC			
Signal to Noise Ratio	More than 48dB			
Gamma Correction	0.45			
Mechanical IR Cut Filter	NA			
IR LED, Working Distance	24 units (IR LEDs on<2Lux, IR LEDs off>5Lux) ; Indoor:10~15m			
Synchronizing System	Internal			
Automatic Electronic Shutter	Automatic, 1/50(60)sec.~1/100,000sec.			
Automatic Gain Control	Automatic			
Automatic White Balance	Automatic			
Back Light Compensation	NA		Automatic	
Flickerless	NA			
DNR ; Sense Up	NA			
Digital Day&Night Mode	NA			
Automatic IRIS	NA			
Adjustment VR	NA			
Lens Mount	Built-in Board Lens			
Lens, Angle of View(H)	Standard: f4.3mm/F2.0/63 ° Options:f6.0mm/47.5 ° ,f8.0mm/36.5 °			
Power Supply ; Consumption	12Vdc ; IR on:4.2W(345mA) IR off:2.0W(165mA)		12Vdc ; IR on:3.3W(270mA) IR off:1.1W(90mA)	
Operation ; Storage Temp.	-10 °C~50 °C ; -20 °C~60 °C			
Operation ; Storage Humidity	Maximum:RH80% ; RH90%			
Dimensions	106(DIA)x95(H)mm			
Net Weight	275g			
Accessories Series Option(Page)	Wall Bracket:MTB-201(G-3)			